


DF1800 Catalogue

Local Data Monitoring System



For Reliable, Secure and Economical Energy System Operation

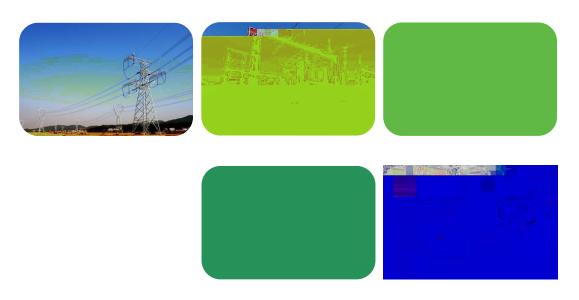

Summary


DF1800 Local Data Monitoring System is integrated solution for analysis and operation of transmission and distribution substation, photovoltaic power station and wind power station. DF1800 provides the functions of supervisory & control, network analysis, safe and economical operation instruction, dispatch information management, active power/reactive power control, voltage control, etc.

DF1800 is developed under an established quality assurance program and has been used as high reliability Electrical Power Automation Systems software worldwide.

DF1800 was developed under a modular designing concept and with Server/Client architecture. It is a Reliable, Scalable and Flexible system.

System Hierarchy

DF1800 LDMS software system has four layers in design:

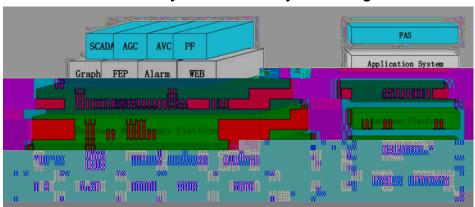

The First: Distributed System Operation and Development Middleware Platform

It is called general OS platform layer. It is a middleware between DF1800 LDMS system and different operating systems. This middleware isolates DF1800 applications with OS, at the same time, it provides uniformed OS function interface for DF1800 applications, and it provides operation environment for the applications. And it makes DF1800 system high portable. It assures that different operation systems like Windows, different UNIX, Linux can be used at the same time in system. For example HP-UNIX, IBM AIX, SUN Solaris,

Linux, Windows Server & Windows Workstation etc. So it can provide most cost-effective solutions for power enterprises and protect the customer's investment.

The Second: Object Oriented Real Time Database Middleware Layer following IEC61970/IEC61968

It is called uniform power application platform. It adopts the object oriented power device model definition and EMSAPI established by IEC, it is a power system application oriented real time database management system. The



special platform, makes SCADA, AVC, AGC have application level openness based on IEC 61970/61968 CIM/CIS, and makes the application software modules "Plug and Play" possible.

The Third: Application Platform Layer

It provides general application interfaces and service for SCADA, AGC, AVC and other applications. It is composed of integrated GUI, integrated drawing-modeldatabase editing tool, printing service, data acquisition service, web service and interconnection adapter with other systems. The establishment of application platform layer makes it easy for the system development and upgrade.

The Fourth: Power Application Software Layer

This layer includes many power system applications, such as SCADA, AGC, AVC, Photovoltaic Power Forecasting, Wind Power Forecasting, etc.

Application Modules

DF1800 SCADA Software Modules

DF1800 SCADA HMI

DF1800 SCADA Database Editor

DF1800 SCADA Data Viewer

DF1800 SCADA Database Backup Manager

DF1800 SCADA Database Connection Monitor

DF1800 SCADA Drawing Editor

DF1800 SCADA Front End Viewer

DF1800 SCADA Front End Server

DF1800 SCADA Real Time Alarm Viewer

DF1800 SCADA Historical Event Viewer

DF1800 SCADA Report Manager

DF1800 SCADA System Manager

DF1800 SCADA Real Time Database Sever

DF1800 SCADA Real Time Database Viewer

DF1800 Advanced Software Modules

DF1800 Web Server

DF1800 Application Programming Interface

DF1800 Photovoltaic/Wind Power Forecasting

DF1800 Automatic Generation Control

DF1800 Automatic Voltage Control



System Features

Integrated Hardware/Software Platform

 Provide uniform application developing interfaces to improve the efficiency of system upgrade and customer á



Basic SCADA Modules

DF1800 SCADA HMI

DF1800 SCADA HMI Module is distributed and fully-graphical human-machine interface developed based on network window system X-Window, industrial standard OSF/Motif or Windows and threedimensional graphics standard OpenGL. The system fully takes into account the different requirements proposed different applications, such as NAS, DMS, AGC, DMIS, AMR and TMS when designing, and mixes the miscellaneous requirements. All the operations can be performed on the human-machine interface, via clicking mouse to make the operation more convenient. The shortcut operations are defined too, which make the operation more simple and convenient. The single key can be defined to navigate display also to speed up the operation.


DF1800 SCADA Database Editor

- Set an object-oriented data model referenced to CIM, to establish the foundation for the "plug-and-play" of the application software.

 Output

 Out
- Implementing the "seamless conn o






DF1800 SCADA Database Backup Manager

DF1800 SCADA Database Backup Manager module is for dumping, replication and transcription the Database, its menu is convenient and friendly. To display the parameter table structure is also provided.



DF1800 SCADA Database Connection Monitor


DF1800 SCADA Database Connection Monitor Module is the interface for outputting database accessing command and the operation result. This interface helps the system administrator to diagnose the system running status.



DF1800 SCADA Drawing Editor

DF1800 SCADA Drawing Editor Module adopts the object-oriented technique. All devices and electric power symbol are treated as objects. The system can display three dimension images and flashes, many kinds of fonts. The system also supports Unix system X terminal and simulated X terminal on a PC.

DF1800 SCADA Drawing Editor Module is able to display drawing on static or dynamic mode with multilayer structure. The system has unlimited display of layer and view and may set database information for Power Device. The system also integrates the power device symbol pre-defined function. The DF1800 SCADA Drawing Editor can synchronize the modified drawing via network after the archiving command is issued.



DF1800 SCADA Front End Viewer


DF1800 SCADA Front End Viewer Module displays the parameters of the FEP system, checks the channel buffer, monitors the RTU status, watches the raw real-time data, and tests the data transmission. It also acts as the protocol analyzer.



DF1800 Local Data Monitoring System Catalogue

point violating limit, and so on.

DF1800 SCADA Real Time Alarm Viewer provides SMS and Email Messenger. The module uses the short-message service supplied by the mobile communication service to send the classified and filtered SCADA system's information to the dedicated mobile phone. The subsystem can make the user gathering the real-time information of the power grid easily at any time and in any place via using the public SMS. It can speed up the efficiency for restoring the power grid's abnormal accident. Customer can set the information style according to their requirement. The improve can the operation efficiency and reduce the labor intension



DF1800 SCADA Historical Event Viewer

DF1800 SCADA Historical Event Viewer Module is the interface to retrieve the history event. It is useful to analyze accident of the power grid. The interface provides the access to set the event searching condition.

The module provides the function of event editing, such as add an event record, delete an event record or modify an event record.

Statistics Haddill

Figure Team (data dougle


DF1800 SCADA Front End Sever

- Support synchronous/asynchronous channel
- Auto-Switch main/standby channel according to channel status
- Auto-Switch main/standby FEP according to host status
- Monitor and control the running status of channel
- Support all standard international communication protocol (such as IEC60870-5-101, IEC60870-5-103, IEC60870-5-104, IEC61850, MODBUS serial or Over IP, DNP 3.0 serial or Over IP, etc.)
- Adopt Terminal Server to allow the serial equipment to be connected to LAN and WAN directly.
- Support 4G/3G/GPRS communication


DF1800 SCADA Real Time Alarm Viewer

All the alarm and event have attributes like: priority, point or device name, substation name, type, time, status or value, area of responsibility, etc. And alarm style, description, sound or not are user definable.

Alarms include: fault trip, no command change of switch, protection signal, fault trip times of breaker violating limit, analog value violating limits, change rate of analog











Advanced Software Modules

DF1800 Web Server

- Based on Browser/Server (B/S) architecture
- Provide graphical data browsing via IE browser

Dongfang Electronics International Engineering Co., Ltd.

Dongfang Electronics Co., Ltd.


Address: No.2 Jichang Road, Yantai, Shandong Province, P.R. China, 264000

Tel: +86-535-5520949

Fax: +86-535-5520930

Email: idf@dongfang-china.com

Website: http://www.dongfang-china.com/en

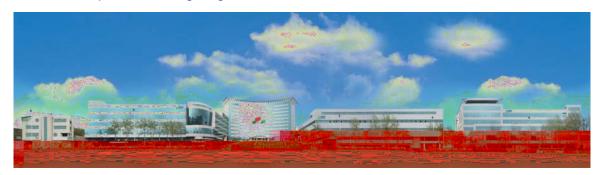

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF DONGFANG ELECTRONICS INTERNATIONAL ENGINEERING CO., LTD. ALL RIGHTS RESERVED.